

Waveforms for the Massive MIMO Downlink: Amplifier Efficiency, Distortion and Performance

Christopher Mollén, Erik G. Larsson and Thomas Eriksson

Abstract—In massive MIMO, most precoders result in downlink signals that suffer from high PAR, independently of modulation order and whether single-carrier or OFDM transmission is used. The high PAR lowers the power efficiency of the base station amplifiers. To increase power efficiency, low-PAR precoders have been proposed. In this article, we compare different transmission schemes for massive MIMO in terms of the power consumed by the amplifiers. It is found that (i) OFDM and single-carrier transmission have the same performance over a hardened massive MIMO channel and (ii) when the higher amplifier power efficiency of low-PAR precoding is taken into account, conventional and low-PAR precoders lead to approximately the same power consumption. Since downlink signals with low PAR allow for simpler and cheaper hardware, than signals with high PAR, therefore, the results suggest that low-PAR precoding with either single-carrier or OFDM transmission should be used in a massive MIMO base station.

Index Terms—low-PAR precoding, massive MIMO, multiuser precoding, out-of-band radiation, peak-to-average ratio, power amplifier, power consumption.

I. INTRODUCTION

WIRELESS massive MIMO systems, initially conceived in [2] and popularly described in [3], simultaneously serve tens of users with base stations equipped with tens or hundreds of antennas using multiuser precoding. Compared to classical multiuser MIMO, order-of-magnitude improvements are obtained in spectral and energy efficiency [4], [5]. For these reasons, massive MIMO is expected to be a key component of future wireless communications infrastructure [3], [6].

This work compares different multiuser precoding schemes for the massive MIMO downlink. Under a *total radiated* power constraint, optimal multiuser MIMO precoding is a rather well-understood topic, see, e.g., [7], [8], as is linear (and necessarily suboptimal) precoding, see, e.g., [9] and the survey [10]. It is also known that, for massive MIMO specifically, linear precoding is close to optimal under a total-radiated power constraint [5]. There are also numerous results on precoding under *per-antenna* power constraints [11]–[13].

In practice, massive MIMO precoders optimized subject to a total radiated power constraint yield transmit signals with high peak-to-average ratio (PAR), regardless of whether single-carrier

C. Mollén and E. Larsson are with the Communication Systems Division, Dept. of Electrical Eng. (ISY), Linköping University, Linköping, Sweden, and T. Eriksson is with the Dept. of Signals and Systems, Chalmers University of Technology, Gothenburg, Sweden.

The research leading to these results has received funding from the European Union Seventh Framework Programme under grant agreement number ICT-619086 (MAMMOET), the Swedish Research Council (Vetenskapsrådet) and ELLIIT.

Parts of this work were presented at the European Wireless conference 2014 [1].

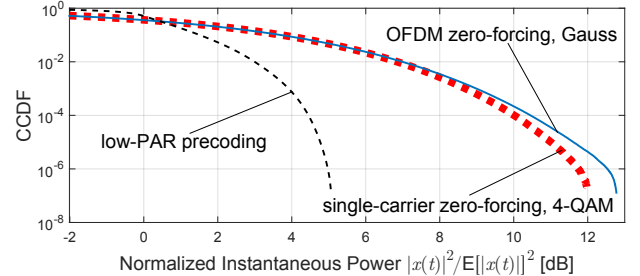


Fig. 1. The complimentary cumulative distribution of the amplitudes of different massive MIMO downlink signals that have been pulse shaped by a root-raised cosine filter, roll-off 0.22. Single-carrier and OFDM transmission have very similar distributions for the linear precoders described in Section III-B3 for any modulation order, cf. [15]. The low-PAR precoding scheme is described in [16] and in Section III-C. The system has 100 base station antennas, 10 single-antenna users and the channel is i.i.d. Rayleigh fading with 4 taps.

or OFDM transmission and whether a low or a high modulation order is used, see Figure 1. To avoid heavy signal distortion and out-of-band radiation, transmission of such signals requires that the power amplifiers are backed off and operated at a point, where their transfer characteristics are sufficiently linear [14]. The higher the signal PAR is, the more backoff is needed; and the higher the backoff is, the lower the power efficiency of the amplifier will be. Against this background, precoders that yield signals with low PAR would be desirable.

The possibility to perform low-PAR precoding is a unique opportunity offered by the *massive* MIMO channel—signal peaks can be reduced because the massive MIMO downlink channel has a large nullspace and any additional signal transmitted in the nullspace does not affect what the users receive. In particular, PAR-reducing signals from the channel nullspace can be added to the downlink signal so that the emitted signals have low PAR [3], [17]. A few low-PAR precoders for massive MIMO have been proposed in the literature [16]–[18]. In [17], the discrete-time downlink signals were constrained to have constant envelopes.¹ There it was estimated that, in typical massive MIMO scenarios, 1–2 dB extra radiated power is required to achieve the same sum-rate as without an envelope constraint. While some extra radiated power is required by low-PAR precoders, it was argued in [17] that the overall power consumption still should decrease due to the increased amplifier efficiency.

Another unique feature of the massive MIMO downlink

¹Note that the precoder in [17] can transmit symbols from any general input constellation with single-carrier transmission and OFDM—the received signals do not have to have constant envelopes, only the downlink signal emitted from each base station antenna has constant envelope.

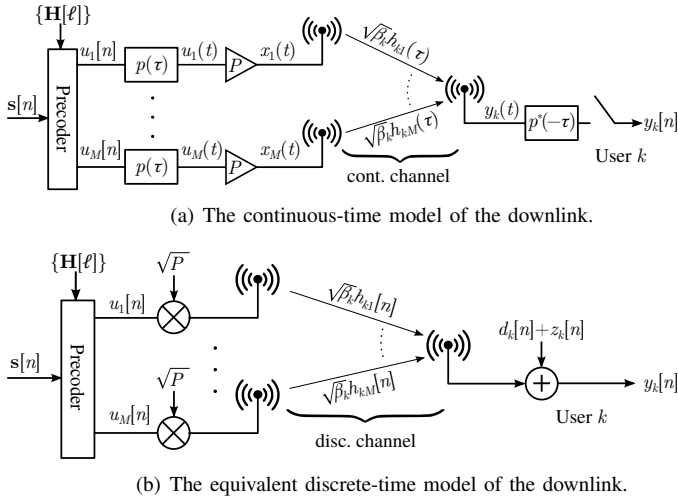


Fig. 2. The downlink of a massive MIMO system.

channel is that certain types of hardware-induced distortion tend to average out when observed at the receivers [19]. Our study confirms that the variance of the in-band distortion caused by nonlinear base station amplifiers does decrease with the number of base station antennas.

The objective of the paper at hand is to more accurately quantify the benefits of low-PAR precoding for the massive MIMO downlink, taking into account in-band distortion and out-of-band radiation stemming from amplifier nonlinearities and imperfect channel state information due to pilot-based channel estimation. The difference between OFDM and single-carrier transmission is also investigated. The main technical contribution of the paper is a comprehensive end-to-end modelling of massive MIMO downlink transmission, which is treated in continuous time in order to capture the effects of nonlinear amplification, the associated capacity bound, and the estimations of the power consumption for relevant amplifier models. All conclusions are summarized in Section V.

We stress that the effect of amplifier nonlinearities on wireless signals have also been studied by others [14], [20], and for MIMO specifically in [21]. In relation to this literature, the novel aspects of our work include: (i) a specific focus on the massive MIMO downlink channel, which facilitates low-PAR precoding; (ii) a classification and comparison of precoders commonly considered for massive MIMO; (iii) an estimate of the amplifier power consumption of low-PAR precoding in comparison to that of other standard precoders.

II. SYSTEM MODEL

The downlink shown in Figure 2(a) is studied. The base station is equipped with M antennas and it serves K single-antenna users over a frequency-selective channel. All signals are modeled in complex baseband.

We let $s_k[n]$ be the n -th symbol that is to be transmitted to user k and collectively denote all the n -th symbols by $\mathbf{s}[n] \triangleq (s_1[n], \dots, s_K[n])$. The base station precodes the symbols to produce the discrete-time signals $\{u_m[n]\}$, where $u_m[n]$ is the precoded signal of antenna m . These signals are scaled such

that

$$\sum_{m=1}^M \mathbb{E}[|u_m[n]|^2] = 1, \quad \forall n \quad (1)$$

and pulse shaped by a filter with impulse response $p(\tau)$ into the continuous-time transmit signals

$$u_m(t) \triangleq \sum_n u_m[n]p(t - nT), \quad (2)$$

where T is the symbol period. After pulse shape filtering, the transmit signal $u_m(t)$ has a bandwidth smaller or equal to the bandwidth B of the pulse $p(\tau)$. The bandwidth B is the width of the interval, over which the spectrum of $p(\tau)$ is non-zero. For example, if a root-raised cosine filter of period T with roll-off σ were used, then $BT = 1 + \sigma$.

The continuous-time signal $u_m(t)$ is then amplified to transmit power by an amplifier that, in general, is nonlinear. The amplified signal is given by

$$x_m(t) = g\left(\frac{|u_m(t)|}{\sqrt{b}}\right)e^{j(\arg u_m(t) + \Phi(|u_m(t)|/\sqrt{b}))}, \quad (3)$$

where $g(|u_m(t)|)$ is the AM-AM conversion and $\Phi(|u_m(t)|)$ the AM-PM conversion, see for example [15]. For now, the conversions $g(u)$ and $\Phi(u)$ are generic functions. Later in our analysis however, appropriate assumptions will be made to specify them. The factor b is the backoff that has to be done to avoid nonlinear amplification and distortion. By backing off the signal power to a suitable operating point, the signal amplitude will stay in a region with sufficiently linear amplification most of the time, see [15]. In this article, all backoffs are given in dB relative to the backoff of the 1-dB compression point—the point, where the output signal is 1 dB weaker than what it would have been if the amplification were perfectly linear. The signals are amplified so that

$$\lim_{t_0 \rightarrow \infty} \sum_{m=1}^M \mathbb{E} \left[\frac{1}{t_0} \int_{-t_0/2}^{t_0/2} |x_m(t)|^2 dt \right] = P, \quad (4)$$

where P is the transmitted power of the base station.

The nonlinear relation in (3) generally widens the spectrum of the amplified signal, i.e. its signal energy is no longer confined to the bandwidth B of the pulse $p(\tau)$. The energy outside the ideal bandwidth is called *out-of-band radiation* and is quantified by the *Adjacent Channel Leakage Ratio* (ACLR), which is defined in terms of the power $P_{[-B/2, B/2]}$ of $x_m(t)$ in the useful band and the powers $P_{[-3B/2, -B/2]}$, $P_{[B/2, 3B/2]}$ in the immediately adjacent bands:

$$\text{ACLR} \triangleq \max \left(\frac{P_{[-3B/2, -B/2]}}{P_{[-B/2, B/2]}}, \frac{P_{[B/2, 3B/2]}}{P_{[-B/2, B/2]}} \right), \quad (5)$$

where

$$P_B \triangleq \int_{f \in B} S_x(f) df. \quad (6)$$

and $S_x(f)$ is the power spectral density of $x_m(t)$. In Figure 3, four power spectral densities of different amplified signals are shown to illustrate the out-of-band radiation. Half the in-band spectrum is shown together with the whole right band.

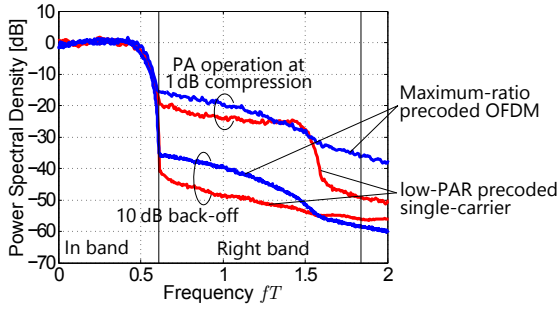


Fig. 3. The power spectral densities after amplification of two signal types with the PA operating at the 1 dB compression point (upper two curves) and well below saturation (lower two curves). The signals are from the system later described in Table I, where the bandwidth of the pulse $p(\tau)$ is $BT = 1.22$.

This signal is broadcast over the channel, whose small-scale fading impulse response from antenna m to user k is $h_{km}(\tau)$ and large-scale fading coefficient to user k is β_k . Specifically, user k receives the signal

$$y_k(t) = \sqrt{\beta_k} \sum_{m=1}^M (h_{km}(\tau) \star x_m(\tau))(t) + z_k(t), \quad (7)$$

where $z_k(t)$ is a stationary white Gaussian stochastic process with spectral height N_0 that models the thermal noise of the user equipment. The received signal is passed through a filter matched to the pulse $p(\tau)$ and sampled to produce the discrete-time received signal

$$y_k[n] \triangleq (p^*(-\tau) \star y_k(\tau))(nT). \quad (8)$$

In analyzing this system, we will look into an equivalent discrete-time system, see Figure 2(b). In order to do that, the distortion produced by the nonlinear amplifier has to be treated separately, since the nonlinearity widens the spectrum and is not accurately described by symbol-rate sampling. The small-scale fading coefficients of the discrete-time impulse response of the channel, including the pulse-shaping and matched filter, between antenna m and user k are denoted

$$h_{km}[\ell] \triangleq T(p(\tau) \star h_{km}(\tau) \star p^*(-\tau))(\ell T). \quad (9)$$

For these channel coefficients, we assume that

$$\mathbb{E}[h_{km}^*[\ell]h_{km}[\ell']] = 0, \quad \forall \ell \neq \ell', \quad (10)$$

$$\sum_{\ell=0}^{L-1} \mathbb{E}[|h_{km}[\ell]|^2] = 1, \quad \forall k, m, \quad (11)$$

and that $h_{km}[\ell]$ is zero for integers $\ell \notin [0, L-1]$, where L is the number of channel taps.

The n -th received sample at user k is then given by

$$y_k[n] = \sqrt{P\beta_k} \left(\sum_{m=1}^M \sum_{\ell=0}^{L-1} h_{km}[\ell] u_m[n-\ell] + d_k[n] \right) + z_k[n], \quad (12)$$

where the noise sample $z_k[n] \triangleq (p^*(-\tau) \star z_k(\tau))(nT)$. To make $z_k[n] \sim \mathcal{CN}(0, N_0/T)$ i.i.d., it is assumed that $p(\tau)$ is a root-Nyquist pulse of period T and signal energy $1/T$. The term $d_k[n]$ describes the *in-band distortion*—the part of the

distortion that can be seen in the received samples $y_k[n]$ —caused by the nonlinear amplification of the transmit signal. It is given by $d_k[n] \triangleq$

$$\frac{1}{\sqrt{P}} \sum_{m=1}^M \left((x_m(t) - \sqrt{P}u_m(t)) \star h_{km}(\tau) \star p^*(-\tau) \right)(nT). \quad (13)$$

By introducing the following vectors

$$\mathbf{u}[n] \triangleq (u_1[n], \dots, u_M[n])^\top \quad \mathbf{y}[n] \triangleq (y_1[n], \dots, y_K[n])^\top$$

$$\mathbf{d}[n] \triangleq (d_1[n], \dots, d_K[n])^\top \quad \mathbf{z}[n] \triangleq (z_1[n], \dots, z_K[n])^\top$$

and matrices

$$\mathbf{H}[\ell] \triangleq \begin{pmatrix} h_{11}[\ell] & \dots & h_{1M}[\ell] \\ \vdots & \ddots & \vdots \\ h_{K1}[\ell] & \dots & h_{KM}[\ell] \end{pmatrix} \quad \mathbf{B} \triangleq \text{diag}(\beta_1, \dots, \beta_K), \quad (14)$$

the received signals can be written as

$$\mathbf{y}[n] = \sqrt{P}\mathbf{B}^{\frac{1}{2}} \left(\sum_{\ell=0}^{L-1} \mathbf{H}[\ell] \mathbf{u}[n-\ell] + \mathbf{d}[n] \right) + \mathbf{z}[n]. \quad (15)$$

If the transmission were done in a block of N symbols per user, and a *cyclic prefix* were used in front of the blocks, i.e.

$$\mathbf{u}[n] = \mathbf{u}[N+n], \quad \text{for } n = -L, \dots, -1, \quad (16)$$

where $n = 0$ is the time instant when the first symbol is received at the users, then the received signal in (15) is easily given in the frequency domain. If the discrete Fourier transforms of the transmit signals, received signals and channel are denoted by

$$\tilde{\mathbf{u}}[\nu] \triangleq \sum_{n=0}^{N-1} e^{-j2\pi n\nu/N} \mathbf{u}[n], \quad (17)$$

$$\tilde{\mathbf{y}}[\nu] \triangleq \sum_{n=0}^{N-1} e^{-j2\pi n\nu/N} \mathbf{y}[n], \quad (18)$$

$$\tilde{\mathbf{H}}[\nu] \triangleq \sum_{\ell=0}^{L-1} e^{-j2\pi \ell \nu/N} \mathbf{H}[\ell], \quad (19)$$

then the received signal at frequency index ν is given by

$$\tilde{\mathbf{y}}[\nu] = \sqrt{P}\mathbf{B}^{\frac{1}{2}} (\tilde{\mathbf{H}}[\nu] \tilde{\mathbf{u}}[\nu] + \tilde{\mathbf{d}}[\nu]) + \tilde{\mathbf{z}}[\nu], \quad (20)$$

where $\tilde{\mathbf{d}}[\nu]$ describes the in-band distortion caused by the nonlinear amplification, $\tilde{\mathbf{z}}[\nu] \sim \mathcal{CN}(0, \frac{N_0}{T} \mathbf{I}_K)$ and $\mathbf{I}_K$ is the K -dimensional identity matrix. The frequency-domain notation in (17)–(19) will be useful when we later consider OFDM-based transmission methods.

In this paper, we limit ourselves to look at block transmission with a cyclic prefix (16). To require a cyclic prefix simplifies our exposition and does not limit its generality much. A prefix is present in almost all modern digital transmission schemes, as a guard interval or as a delimiter between blocks. A prefix that is correlated with the symbols is arguably a waste of spectral resources. However, by letting N be much greater than L , this waste can be made arbitrarily small.

III. DOWNLINK TRANSMISSION

In the downlink, a precoder chooses, based on the channel state information available at the base station, transmit signals

such that the users receive the symbols intended for them. The symbols to be transmitted fulfil

$$\mathbb{E}[|s_k[n]|^2] = \xi_k, \quad \forall n, k, \quad (21)$$

where $\{\xi_k\}$ are power allocation coefficients that are normalized such that

$$\sum_{k=1}^K \xi_k = 1. \quad (22)$$

We assume that the uplink and downlink are separated in time, using so called time-division duplexing, and that each user sends an N_p -symbol long pilot sequence in the uplink that is orthogonal to the pilots of all other users. The pilots are used by the base station to estimate the small-scale fading coefficients $\{h_{km}[\ell]\}$. The large scale fading coefficients $\{\beta_k\}$ are assumed to be known. Note that, to achieve orthogonality between pilots, $N_p \geq KL$. Further, it is assumed that the channel estimates

$$\hat{h}_{km}[\ell] = h_{km}[\ell] - \epsilon_{km}[\ell], \quad \forall k, m, \ell, \quad (23)$$

where $\epsilon_{km}[\ell]$ is the estimation error, are obtained through linear minimum-mean-square estimation, so that $\hat{h}_{km}[\ell]$ and $\epsilon_{km}[\ell]$ are uncorrelated. In analogy with (19), we will denote the Fourier transforms of the channel estimates and the estimation error $\{\hat{h}_{km}[\nu]\}$ and $\{\tilde{\epsilon}_{km}[\nu]\}$ respectively. Their variances are

$$\delta_k \triangleq \sum_{\ell=0}^{L-1} \mathbb{E}[|\hat{h}_{km}[\ell]|^2] = \mathbb{E}[|\hat{h}_{km}[\nu]|^2], \quad (24)$$

$$\mathcal{E}_k \triangleq \sum_{\ell=0}^{L-1} \mathbb{E}[|\epsilon_{km}[\ell]|^2] = \mathbb{E}[|\tilde{\epsilon}_{km}[\nu]|^2]. \quad (25)$$

Note that if $\{h_{km}[\ell]\}$ are i.i.d. across k and m and if the uplink is perfectly linear, then

$$\delta_k = \frac{N_p \rho_p \beta_k}{1 + N_p \rho_p \beta_k}, \quad \mathcal{E}_k = \frac{1}{1 + N_p \rho_p \beta_k}, \quad (26)$$

where ρ_p is the ratio between the power used to transmit the pilots and the thermal noise variance of a base station antenna.

A. Achievable Data Rates

To treat single-carrier and OFDM transmission together, let

$$\bar{y}_k[n] \triangleq \begin{cases} y_k[n], & \text{if single-carrier transmission} \\ \tilde{y}_k[n], & \text{if OFDM transmission} \end{cases} \quad (27)$$

be the n -th received sample at user k . A lower bound on the capacity of the downlink channel to user k is given by [19]

$$R_k \triangleq \log_2(1 + \text{SINR}_k), \quad (28)$$

where the signal-to-interference-and-noise ratio is given by

$$\text{SINR}_k = \frac{|\mathbb{E}[\bar{y}_k^*[n] s_k[n]]|^2 / \xi_k}{\mathbb{E}[|\bar{y}_k[n]|^2] - |\mathbb{E}[\bar{y}_k^*[n] s_k[n]]|^2 / \xi_k} \quad (29)$$

To evaluate (28), we consider the following signal:

$$r_k[n] = \begin{cases} \sum_{m=1}^M \sum_{\ell=0}^{L-1} \hat{h}_{km}[\ell] u_m[n - \ell], & \text{if SC} \\ \sum_{m=1}^M \hat{h}_{km}[n] \tilde{u}_m[n], & \text{if OFDM} \end{cases} \quad (30)$$

and define the deterministic constant

$$g_k \triangleq \frac{1}{\sqrt{\delta_k \xi_k}} \mathbb{E}[s_k^*[n] r_k[n]]. \quad (31)$$

Here g_k is normalized by $\sqrt{\delta_k}$ so that it does not depend on the estimation error. This normalization will later allow us to see the impact of the channel estimation error on the SINR. The fact that g_k does not depend on δ_k is seen by expanding g_k as is done in (73) in the Appendix.

Now the received signal can be written

$$\bar{y}_k[n] = \sqrt{P\beta_k} (g_k \sqrt{\delta_k} s_k[n] + i_k[n] + e_k[n] + \bar{d}_k[n]) + \bar{z}_k[n]. \quad (32)$$

In this sum, the first term is equal to the signal of interest, scaled by $g_k \sqrt{\delta_k}$. The second term

$$i_k[n] \triangleq r_k[n] - g_k \sqrt{\delta_k} s_k[n] \quad (33)$$

is a term comprising interference and downlink channel gain uncertainty (as in [5]). The third term in (32)

$$e_k[n] \triangleq \begin{cases} \sum_{m=1}^M \sum_{\ell=0}^{L-1} \epsilon_{km}[\ell] u_m[n - \ell], & \text{if SC} \\ \sum_{m=1}^M \tilde{\epsilon}_{km}[n] \tilde{u}_m[n], & \text{if OFDM} \end{cases} \quad (34)$$

is the error due to imperfect channel state knowledge at the base station. The last two terms in (32) are the in-band distortion that the users see because of nonlinear amplification and thermal noise respectively:

$$\bar{d}_k[n] \triangleq \begin{cases} d_k[n] \\ \tilde{d}_k[n] \end{cases} \quad \bar{z}_k[n] \triangleq \begin{cases} z_k[n], & \text{if SC} \\ \tilde{z}_k[n], & \text{if OFDM} \end{cases} \quad (35)$$

The interference $i_k[n]$ is uncorrelated with $s_k[n]$ in (32), because

$$\begin{aligned} \mathbb{E}[s_k^*[n] i_k[n]] &= \mathbb{E}[s_k^*[n] (r_k[n] - g_k \delta_k^{\frac{1}{2}} s_k[n])] \\ &= \mathbb{E}[s_k^*[n] r_k[n]] - g_k \delta_k^{\frac{1}{2}} \xi_k = 0. \end{aligned} \quad (36)$$

The in-band distortion $\bar{d}_k[n]$, on the other hand, is correlated with $s_k[n]$ and $i_k[n] + e_k[n]$. These two correlations, we denote, similarly to (31),

$$c_k \triangleq \frac{1}{\sqrt{\delta_k \xi_k}} \mathbb{E}[s_k^*[n] \bar{d}_k[n]], \quad (37)$$

$$\rho_k \triangleq \frac{1}{I_k + E_k} \mathbb{E}[(i_k^*[n] + e_k^*[n]) \bar{d}_k[n]], \quad (38)$$

where

$$E_k \triangleq \mathbb{E}[|e_k[n]|^2], \quad (39)$$

$$I_k \triangleq \mathbb{E}[|i_k[n]|^2], \quad (40)$$

are the channel error and interference variances. We note that, when (26) holds, $E_k = \mathcal{E}_k$. The in-band distortion can now be divided into three parts:

$$\bar{d}_k[n] = c_k \sqrt{\delta_k} s_k[n] + \rho_k (i_k[n] + e_k[n]) + d'_k[n], \quad (41)$$

The first part of the in-band distortion: $d'_k[n]$ is uncorrelated to $s_k[n]$ and $i_k[n] + e_k[n]$, for the same reason $s_k[n]$ and $i_k[n]$ are uncorrelated in (36). The factor c_k is thus the amount of amplitude that the nonlinear amplification “contributes” to the amplitude of the desired signal. Usually, in a real-world system,

this is a negative contribution in the sense that $|g_k + c_k| < |g_k|$. It should therefore be seen as the amount of amplitude lost (in what is usually called *clipping*). Similarly, the other correlation ρ_k is the amount of interference that is clipped by the nonlinear amplification. Finally, we denote the variance of the in-band distortion

$$D_k \triangleq \mathbb{E}[|d'_k[n]|^2]. \quad (42)$$

With this new notation, the two expectations in (29) can be written as follows.

$$\mathbb{E}[|\bar{y}_k^*[n]s_k[n]|^2/\xi_k] = \delta_k \xi_k P \beta_k |g_k + c_k|^2 \quad (43)$$

$$\mathbb{E}[|\bar{y}_k[n]|^2] = P \beta_k (\delta_k \xi_k |g_k + c_k|^2 + (I_k + E_k)|1 + \rho_k|^2 + D_k) + \frac{N_0}{T} \quad (44)$$

This simplifies (29), which becomes

$$\text{SINR}_k = \frac{\delta_k \xi_k P \beta_k |g_k + c_k|^2}{P \beta_k ((I_k + E_k)|1 + \rho_k|^2 + D_k) + \frac{N_0}{T}}. \quad (45)$$

From (45), the two consequences of nonlinear amplification can be seen: (i) in-band distortion with variance D_k and (ii) signal clipping by c_k , a reduction of the signal amplitude that results in a power-loss.

We also see that the variance δ_k is the fraction between the power that would have been received if the channel estimates were perfect and the actually received power. It can thus be seen as a measure of how much power that is lost due to imperfect channel state information at the base station.

The bound (28) is an achievable rate of a system that uses a given precoder and where the detector uses (31) as a channel estimate and treats the error terms in (32) as additional uncorrelated Gaussian noise. This detector has proven to be close to the optimal detector in environments, where the massive MIMO channel hardens.

B. Linear Precoding Schemes

With knowledge of the channel, the base station can *precoder* the symbols in such a way that the gain g_k is big and the interference I_k small.

1) *OFDM-Transmission*: In OFDM transmission, the precoder is defined in the frequency domain. The time domain transmit signals are obtained from the inverse Fourier transform

$$\mathbf{u}[n] \triangleq \sum_{\nu=0}^{N-1} e^{j2\pi n\nu/N} \tilde{\mathbf{u}}[\nu] \quad (46)$$

of the precoded signals

$$\tilde{\mathbf{u}}[\nu] = \tilde{\mathbf{W}}[\nu] \mathbf{s}[\nu], \quad \nu = 1, \dots, N-1 \quad (47)$$

where $\tilde{\mathbf{W}}[\nu]$ is a precoding matrix for frequency ν . The precoding is linear, because the precoding matrix does not depend on the symbols, only on the channel.

To ensure that (1) is fulfilled, it is required that

$$\mathbb{E}[\|\tilde{\mathbf{W}}[\nu]\|_F^2] = K, \quad \forall \nu. \quad (48)$$

2) *Single-Carrier Transmission*: The transmit signals of single-carrier transmission are given by the cyclic convolution

$$\mathbf{u}[n] = \sum_{\ell=0}^{N-1} \mathbf{W}[\ell] \mathbf{s}[n - \ell], \quad (49)$$

where the indices are taken modulo N . The impulse response of the precoder is given in terms of its frequency domain counterpart:

$$\mathbf{W}[\ell] \triangleq \sum_{\nu=0}^{N-1} e^{j2\pi\nu\ell/N} \tilde{\mathbf{W}}[\nu]. \quad (50)$$

3) *Conventional Precoders*: In this paper, three conventional precoders are studied. They will be given as functions of the channel estimates $\{\hat{\mathbf{H}}[\ell]\}$ (a sequence of matrices defined in terms of $\{\hat{h}_{km}[\ell]\}$ in the same way as $\mathbf{H}[\ell]$ is defined in (14) in terms of $\{h_{km}[\ell]\}$) and its Fourier transform

$$\hat{\mathbf{H}}[\nu] \triangleq \sum_{\ell=0}^{N-1} \hat{\mathbf{H}}[\ell] e^{-j2\pi\nu\ell/N}. \quad (51)$$

The factors α_x used in the definitions below are normalization constants, chosen such that (48) holds.

a) *Maximum-Ratio Precoding*: Maximum-ratio precoding is the precoder that maximizes the gain g_k and the received power of the desired signal. It is given by

$$\tilde{\mathbf{W}}[\nu] = \alpha_{\text{MR}} \hat{\mathbf{H}}^H[\nu], \quad \text{for MR.} \quad (52)$$

While it maximizes the received power of the transmission, interference $I_k \neq 0$ is still present in the received signal. In typical scenarios with favorable propagation, maximum-ratio precoding suppresses this interference increasingly well with higher number of base station antennas and in the limit of infinitely many antennas, the interference becomes negligible in comparison to the received power [2]. For maximum-ratio precoding and an i.i.d. Rayleigh fading channel, both with single-carrier and OFDM transmission, the array gain and interference terms are [5]

$$g_k = \sqrt{M}, \quad I_k = \delta_k, \quad \text{for MR.}$$

Because the precoding weights of antenna m only depend on the channel coefficients $\{\hat{h}_{km}[\ell]\}$ of that antenna, maximum-ratio precoding can be implemented in a distributed fashion, where the precoding is done locally at each antenna.

Note that this definition of maximum-ratio precoding makes it equivalent to time-reversal precoding for single-carrier transmission, see for example [22].

b) *Zero-Forcing Precoding*: The zero-forcing precoder is given by

$$\tilde{\mathbf{W}}[\nu] = \alpha_{\text{ZF}} \hat{\mathbf{H}}^H[\nu] (\hat{\mathbf{H}}[\nu] \hat{\mathbf{H}}^H[\nu])^{-1}, \quad \text{for ZF.} \quad (53)$$

It nulls the interference I_k at the cost of a lower gain g_k compared to maximum-ratio precoding. For zero-forcing precoding and an i.i.d. Rayleigh fading channel, both with single-carrier and OFDM transmission, the gain and interference terms are [5]

$$g_k = \sqrt{M - K}, \quad I_k = 0, \quad \text{for ZF.}$$

c) *Regularized Zero-Forcing Precoding*: Regularized zero-forcing precoding aims at maximizing the received SINR (45). In the limit of an infinite number of antennas, the optimal linear precoder is given by [23]

$$\tilde{\mathbf{W}}[\nu] = \alpha_{\text{RZF}} \hat{\mathbf{H}}^H[\nu] (\hat{\mathbf{H}}[\nu] \hat{\mathbf{H}}^H[\nu] + \rho \mathbf{I}_K)^{-1} \quad \text{for RZF,} \quad (54)$$

where $\rho \in \mathbb{R}^+$ is a system parameter, which depends on the ratio PT/N_0 and on the path losses $\{\beta_k\}$ of the users. The regularized zero-forcing precoder balances the interference suppression of zero-forcing and array gain of maximum-ratio precoding [10] by changing the parameter ρ . How to find the optimal parameter ρ is described in [23] and later in Section IV-B.

The interference I_k and gain g_k of regularized zero-forcing depend on the parameter ρ and no closed-form expression for them is known. However, when the transmit power P is low compared to the noise variance N_0/T , then a big ρ is optimal and the interference and array gain are close to the ones of maximum-ratio precoding. And when the transmit power relative the noise variance is high, a small ρ is optimal and the interference and array gain are close to the ones of zero-forcing.

C. Discrete-Time Constant-Envelope Precoding

The low-PAR precoding scheme originally proposed in [24] and extended in [16], [17], here called *discrete-time constant-envelope* precoding, is briefly described in two sections, first for single-carrier transmission, then for OFDM.

1) *Single-Carrier Transmission*: The discrete-time constant-envelope precoder produces transmit signals that have constant-envelope when viewed in discrete time, i.e.

$$|u_m[n]| = \frac{1}{\sqrt{M}}, \quad \forall n, m. \quad (55)$$

It does so by minimizing the difference between the received noise-free signal and the desired symbols under a fixed modulus constraint, $\{u_m[n]\} =$

$$\arg \min_{\{u_m[n] = M^{-1/2}\}} \sum_{n=0}^{N-1} \left\| \sum_{\ell=0}^{L-1} \hat{\mathbf{H}}[\ell] \mathbf{u}[n-\ell] - \sqrt{\gamma} \mathbf{s}[n] \right\|^2, \quad (56)$$

where $\gamma \in \mathbb{R}^+$ is a system parameter that is chosen to maximize the system performance. Intuitively, a small γ makes the interference I_k small, but the gain g_k small too. On the other hand, a large γ makes the array gain big but also makes it hard to produce the desired symbol at each user, which results in an excessive amount of interference. In Section IV-B, it will be shown how the parameter γ is chosen such that the data rate is maximized.

The optimization problem in (56) can be approximately solved at a low computational complexity by cyclic optimization: minimizing the norm with respect to one $u_m[n]$ at a time, while keeping the other variables fixed. Such a solver is not much heavier in terms of computations than the zero-forcing precoder [16].

2) *OFDM Transmission*: OFDM transmission in connection with discrete-time constant-envelope precoding can be done by using the same algorithm as for the single-carrier transmission.

Instead of precoding the symbols $\{\mathbf{s}[n]\}$ directly, the base station would precode their inverse Fourier transform

$$\tilde{\mathbf{s}}[n] \triangleq \frac{1}{\sqrt{N}} \sum_{\nu=0}^{N-1} e^{j2\pi\nu n/N} \mathbf{s}[\nu]. \quad (57)$$

The convolution in (56) should then be seen as a cyclic, i.e. the indices should be taken modulo N .

D. Power Allocation among Users

The power allocation $\{\xi_k\}$ between users has to be decided according to a chosen criterion, for example that all users shall be served with the same data rate. This “egalitarian” criterion is used in this paper and is given by the max-min problem:

$$\{\xi_k\} = \arg \max_{\{\xi_k\}: \text{eq.(22)}} \min_k \text{SINR}_k, \quad (58)$$

where SINR_k is given in (45). Note that out of all the terms in (45), apart from ξ_k itself, only the clipping c_k , in-band distortion D_k and the correlation ρ_k might depend on ξ_k . That g_k and I_k do not depend on $\{\xi_k\}$, can be seen from (75) and (80) in the Appendix. Extensive simulations over Rayleigh fading channels indicate that only D_k depends on the power allocation ξ_k and that this dependence is linear.

To solve (58), a first-order approximation of the dependence on ξ_k is made. The in-band distortion is assumed to be:

$$D_k = D' + \delta_k \xi_k D'', \quad (59)$$

where D' and D'' are non-negative constants.

For the $\{\xi_k\}$ that solve (58), there is a common SINR such that $\text{SINR}_k = \text{SINR}$, for all k , because (45) is an increasing function in ξ_k . Rearranging (45) gives the power allocation

$$\xi_k = \text{SINR} \frac{P\beta_k((I_k + E_k)|1 + \rho_k|^2 + D') + \frac{N_0}{T}}{\delta_k P\beta_k(|g_k + c_k|^2 - D''\text{SINR})}. \quad (60)$$

Because the power allocations sum to one (22),

$$\text{SINR} \sum_{k=1}^K \frac{P\beta_k((I_k + E_k)|1 + \rho_k|^2 + D') + \frac{N_0}{T}}{\delta_k P\beta_k(|g_k + c_k|^2 - D''\text{SINR})} = 1, \quad (61)$$

the common SINR can be found by solving this equation. The optimal power allocations are thus given by (60), where SINR is the largest solution to (61).

Note that, if $D'' = 0$, (61) can be solved explicitly, which gives an expression for SINR and the optimal power allocation

$$\xi_k = \frac{\frac{1}{\delta_k \beta_k |g_k + c_k|^2} (P\beta_k((I_k + E_k)|1 + \rho_k|^2 + D') + N_0/T)}{\sum_{k'=1}^K \frac{P\beta_{k'}((I_{k'} + E_{k'})|1 + \rho_{k'}|^2 + D') + N_0/T}{\delta_{k'} \beta_{k'} |g_{k'} + c_{k'}|^2}}. \quad (62)$$

Specifically for maximum-ratio precoding when (26) holds, this power allocation becomes

$$\xi_k^{\text{MR}} = \frac{P\beta_k(|1 + \rho_k|^2 + D') + N_0/T}{\beta_k \delta_k \sum_{k'=1}^K \frac{P\beta_{k'}(|1 + \rho_{k'}|^2 + D') + N_0/T}{\beta_{k'} \delta_{k'}}}, \quad \forall k, \quad (63)$$

and, for zero-forcing precoding, it becomes

$$\xi_k^{\text{ZF}} = \frac{P\beta_k(E_k|1 + \rho_k|^2 + D') + N_0/T}{\beta_k \delta_k \sum_{k'=1}^K \frac{P\beta_{k'}(E_{k'}|1 + \rho_{k'}|^2 + D') + N_0/T}{\beta_{k'} \delta_{k'}}}, \quad \forall k. \quad (64)$$

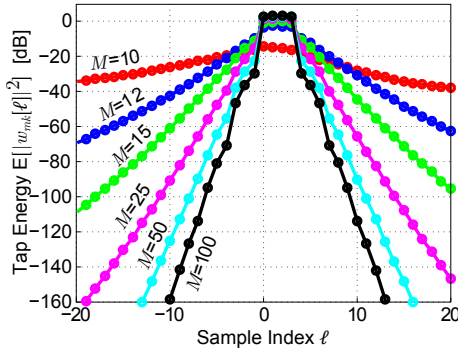


Fig. 4. The normalized energy of the taps of the impulse response of the zero-forcing filter for single-carrier transmission over a frequency-selective 4-tap channel. The base station serves $K = 10$ users.

These two expressions (63) and (64) are equivalent to the corresponding formulas in [25] in the special case there is no amplifier distortion. It should be noted that when the number of users is large, $K \gtrsim 30$, the term D'' is close to zero.

E. Single-Carrier vs. OFDM Transmission

In terms of the achievable data rate (28), which has been proven tight when the channel hardens, single-carrier and OFDM transmission are equivalent in massive MIMO. Due to channel hardening, all tones of the OFDM transmission have equally good channels $\{\hat{\mathbf{H}}[n]\}$, therefore the advantage of OFDM—the possibility to do waterfilling across frequency—results in little gain. This is summarized in the following Proposition and proven in the Appendix.

Proposition 1: If the same precoding scheme $f: \hat{\mathbf{H}}[n] \mapsto \tilde{\mathbf{W}}[n]$ is used for all tones n , the rate in (28) is equal for single-carrier transmission (49) and for OFDM (46).

With regards to implementation, the two transmission methods differ. While OFDM requires a Fourier transform to be done by the users, single-carrier transmission does not. While OFDM causes a delay of at least N symbols, since precoding and detection are done block by block, single-carrier transmission can be implemented for frequency-selective channels with short filters with much smaller delay. Channel inversion with filters with few taps is only possible in massive MIMO—in SISO systems or small MIMO systems, pre-equalization of a frequency-selective channel requires filters with a huge number of taps. This can be seen in Figure 4, which shows the power profile $\{E[|w_{mk}[\ell]|^2], \ell = \dots, -1, 0, 1, \dots\}$ of the impulse response of the zero-forcing precoder for different numbers of base station antennas. With few antennas, zero-forcing requires many filter taps, while, with massive MIMO, it requires approximately the same number of filter taps as the number of channel taps.

Since the symbol period of OFDM is longer than that of single-carrier transmission, NT compared to T , OFDM is less sensitive to synchronization errors in the sampling in (8). While a small time synchronization error, in the order of T , leads to a simple phase rotation in OFDM, it would lead to difficult intersymbol interference in single-carrier transmission. For small frequency synchronization errors, in the order $\frac{1}{NT}$, however, OFDM suffers from intersymbol interference, while

TABLE I
SYSTEM PARAMETERS

number of tx-antennas	$M = 100$
number of users	$K = 10$ and 50
channel model	$L = 4$ -tap Rayleigh fading
pulse shape filter	root-raised cosine, roll-off 0.22
amplifier type	class B, see (69) and (66)
path loss exponent	$\alpha = 3.8$ (typical urban scenario)

single-carrier transmission only experiences a simple phase rotation.

In some implementational aspects, the two transmission methods are similar though. The computational complexities are roughly the same—the Fourier transform that single-carrier transmission spares the users from, has to be done by the base station instead, see (50). We stress that the signals of single-carrier and OFDM transmission practically have the same PAR in massive MIMO, at least in an i.i.d. Rayleigh fading environment. In Figure 1, there was only a small gap between the PAR of single-carrier and OFDM transmission and, when the number of channel taps is greater than $L > 4$, the gap is practically closed.

The operational differences between single-carrier and OFDM transmission are summarized in Table II.

IV. NUMERICAL EVALUATIONS OF RATE

To estimate the power consumed by the amplifiers at different sum-rates and to compare different precoders to each other, the expectations in (28) that lack closed-form expressions were numerically evaluated for the system specified in Table I. All continuous signals were modelled by $\kappa = 7$ times oversampled discrete-time signals. Specifically the channel from antenna m to user k was assumed to be Rayleigh fading $h_{km}(\ell T/\kappa) \sim \mathcal{CN}(0, 1/(\kappa L))$, for $\ell = 0, \dots, \kappa(L-1)$ and i.i.d. across k , m and ℓ . The users were assumed to be uniformly spread out over an annulus-shaped area, with inner radius λ and outer radius 100λ . The path loss of user k was then assumed to be

$$\beta_k = (\lambda/\mathcal{A}_k)^\alpha, \quad (65)$$

where $\mathcal{A}_k$ is the distance between user k and the base station, which is located in the middle of the annulus, and where α is the path loss exponent.

Further, it was assumed that the pilots used for channel estimation were $N_p = KL$ symbols long and sent with the same power ρ_p from all users. The power was chosen such that a signal sent from the cell edge, where the path loss is $\beta_{\min} = 1/100^\alpha$, would be received at the base station with power 0 dB above the noise variance, i.e. $\rho_p \beta_{\min} = N_0/T$ and $\rho_p = 100^\alpha N_0/T$.

A. Effects of Nonlinear Power Amplifiers

The power amplifiers of the simulated system have been modeled by the Rapp model [15], where the phase distortion is neglected, so $\Phi(u) = 0, \forall u$, and the AM-AM conversion is

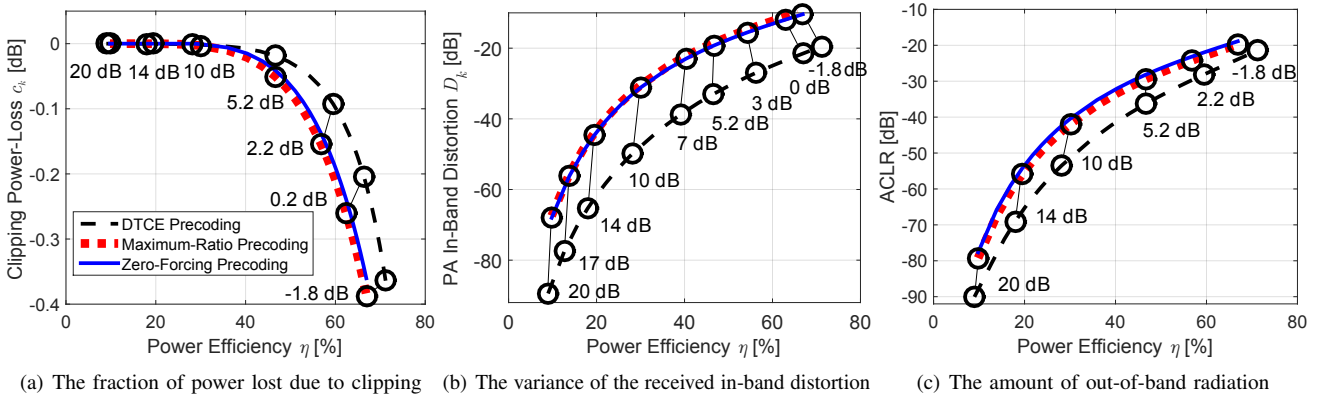


Fig. 5. Measurements on a Rapp-modeled ($p = 2$) class B amplifier for three signal types. The signals have been pulse shape filtered with a root-raised cosine, roll-off factor 0.22. The encircled points correspond to some selected operating points of the amplifier, which are specified by the backoff from the 1-dB compression point. It is assumed that all users are at the same distance to the base station, i.e. $\xi_k = 1/K$, for all k .

given by

$$g(u) = A_{\max} \frac{u/u_{\max}}{(1 + (u/u_{\max})^{2p})^{\frac{1}{2p}}}, \quad (66)$$

where the parameter $p = 2$ approximates a typical moderate-cost solid-state power amplifier [26]. The parameter $A_{\max}$ is the highest possible output amplitude and $u_{\max} = A_{\max}/g'(0)$ determines the slope of the asymptote that $g(u)$ approaches for small u .

To ensure that the total radiated power is P , as is required by (4), the parameters are chosen as follows:

$$u_{\max} = M^{-1/2} \quad (67)$$

$$A_{\max} = u_{\max} \frac{\sqrt{P}}{\lambda_0}, \quad (68)$$

where λ_0 is a correction factor to compensate for the power lost due to clipping, which is chosen such that (4) holds. Note that the correction factor is different for different signal types and backoffs.

Massive MIMO will require simple, inexpensive and power efficient amplifiers [3]. The most basic class B amplifiers have these properties [27], and could therefore potentially be suited for massive MIMO. The power efficiency of such an amplifier is given by [15]

$$\eta = \frac{\pi}{4} \frac{\mathbb{E}[g^2(|u_m(t)|)]}{A_{\max} \mathbb{E}[g(|u_m(t)|)]}, \quad (69)$$

Note that $\eta \leq \pi/4$, with equality only if the continuous-time input signal $u_m(t)$ has perfectly constant envelope and the amplifier operates in saturation.

The two phenomena of nonlinear amplification—in-band distortion and amplitude clipping—are studied by looking at the variance of the in-band distortion $\sigma_k^2 \triangleq \frac{D_k}{\xi_k |g_k|^2}$ and the clipped power $a_k \triangleq \frac{|g_k + c_k|^2}{|g_k|^2}$ relative to the ideal amplitude.

The clipped power was computed together with the power efficiency of the amplifiers for several backoffs and averaged over many channel realizations for the system specified in Table I, in which all users are at the same distance to the base station and $\xi_k = 1/K$, for all k . By treating the backoff as an intermediate variable, the clipped power can be given as

a function of the efficiency, see Figure 5(a). It is noted that the power lost due to clipping is small (smaller than -0.4 dB) even when the amplifiers are operated close to saturation.

Similarly, the variance of the in-band distortion, Figure 5(b), and the ACLR, Figure 5(c), were computed for several backoffs and averaged over different channel realizations. It can be seen that the amount of energy radiated out-of-band is monotonically decreasing with the backoff. A constraint on the ACLR will therefore constrain the maximum efficiency that the amplifier can operate at. Further, it is noted that the efficiency is not a simple function of the backoff, but it depends on the signal type. We also note that, whereas the clipping power-loss is small at operating points with high efficiency, the in-band distortion (at least for the conventional precoders) and the out-of-band radiation are not. The latter two phenomena will thus be the main factors to determine the operating point of the amplifiers.

Because of their similar amplitude distributions, all the linear precoding schemes (MR, ZF, RZF precoding) result in similar curves in Figures 5(a), 5(b) and 5(c). Therefore, only the results of single-carrier maximum-ratio and zero-forcing precoding are shown. The curves are identical to the ones of OFDM transmission.

In Figure 6, it can be seen how the effects of the nonlinear amplifiers change when the number of antennas, users and channel taps are changed in a single-carrier MIMO system. To make comparisons easy, all users in the system of Figure 6 have the same path loss and the amplifiers are backed off by 1 dB, enough to see distinct clusters around each symbol point in all cases.

When the number of users and channel taps are small, the distribution of the in-band distortion is different around different symbol points and the phase tends to be more accurately reproduced than the amplitude, resulting in oblong clouds around the outer symbol points. It is a well-known phenomenon in OFDM with a great number of subcarriers that the distribution of the in-band distortion is almost circularly symmetric Gaussian and identically distributed around each symbol point, which means that the distortion can be regarded as uncorrelated additive noise [20]. In multiuser MIMO, a similar effect is observed—when the number of users and channel taps

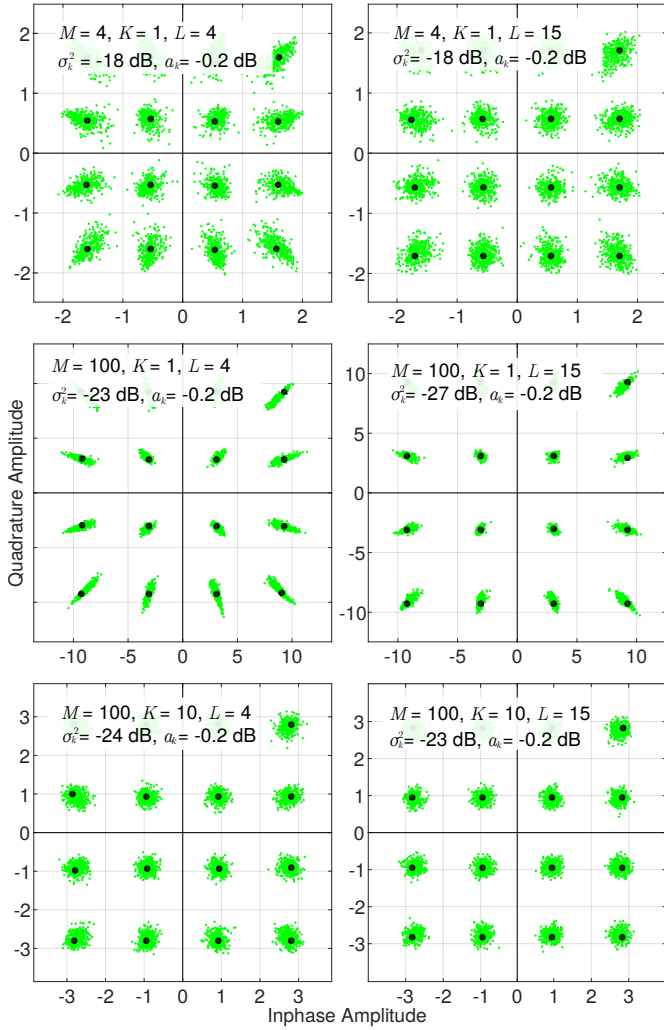


Fig. 6. Received signal points without thermal noise when broadcasting 16-QAM symbols with nonlinear amplification (1 dB backoff) over a MIMO channel by single-carrier zero-forcing precoding for different number of users K , antennas M and channel taps L .

are great, the noise is almost circularly symmetric Gaussian and identically distributed around each symbol point for single-carrier transmission too. This is intuitive, since the precoded transmit signals are the sums of many independent symbols and the receive signals are the sums of many different transmit signals. The in-band distortion therefore gets mixed up and its distribution becomes symmetric and identical around all symbol points, just as is the case in OFDM.

In Figure 6, the variance of the in-band distortion seems to roughly follow the scaling law predicted by [28], which says that the distortion variance relative to the signal power scales as $\mathcal{O}(\sqrt{K/M})$. Although the in-band distortion seems to disappear with increasing number of antennas, the amplitude reduction due to clipping does not (in Figure 6, it remains at -0.2 dB for all system setups), which was not observed in [28]. However, it can be argued that the clipping power-loss is small and only needs to be considered when the amplifiers are operated close to saturation.

B. Data Rate and Power Consumption

In this section the power P_{cons} that the base station amplifiers consume is estimated. Even if the discrete-time constant-envelope precoder outperformed the other precoders in the comparisons in Figure 5, in the end, it is in terms of consumed power the precoders should be compared.

The rate $R_k(P, \theta)$ in (28) is a function of the transmit power $P = \eta P_{\text{cons}}$, and therefore a function of the operating point of the power amplifiers, which are parametrized by their efficiency η . In the case of discrete-time constant-envelope precoding, the rate is also a function of the parameter $\theta = \gamma$. And in the case of regularized zero-forcing, it is a function of the parameter $\theta = \rho$. For a given out-of-band radiation requirement, specified by a maximum ACLR level ACLR_{max} , the sum-rate of the system is thus given by

$$R(P_{\text{cons}}) = \max_{\eta, \theta} \sum_{k=1}^K R_k(\eta P_{\text{cons}}, \theta), \quad (70)$$

where the maximization is over all $\theta \in \mathbb{R}^+$ and over all operating points $\eta \in [0, \eta_{\text{max}}]$, where η_{max} is the highest operating point that still results in an ACLR below ACLR_{max} . If the ACLR is not constrained, η_{max} is taken to be the maximum possible efficiency of the given amplifiers and signal type.

The relation between consumed power and the average sum-rate of the system that is shown in Figure 7 has been obtained by computing (70) for many different user distributions $\{\beta_k\}$ and taking an average. Both the cases (i) when the out-of-band radiation is constrained by requiring the ACLR to be below -45 dB, which is the ACLR requirement in LTE [29], and (ii) when it is not constrained are considered.

It can be seen that maximum-ratio precoding works well for low rate requirements but is limited by interference to below a certain maximum rate. Because the SINR in (45) contains distortion that scales with the radiated power, all precoders have a vertical asymptote, above which the rate cannot be increased. Except for discrete-time constant-envelope precoding, whose curve starts to bend away upwards in the plot for 50 users, this vertical asymptote lies outside the scale and cannot be seen for the other precoders however. Since the array gain $|g_k|^2$ is smaller for discrete-time constant-envelope precoding than for zero-forcing and regularized zero-forcing, its vertical asymptote is located at a lower rate than the asymptote of zero-forcing and regularized zero-forcing precoding.

Further, it can be seen that regularized zero-forcing and zero-forcing perform equally well when the number of users is small. Regularized zero-forcing has an advantage over zero-forcing when the number of users is big though, because of its ability to balance the resulting array gain and the amount of interuser interference received by the users.

The low-PAR precoding scheme, discrete-time constant-envelope precoding, seems to consume roughly the same amount of power as the conventional precoding schemes, both when the ACLR is constrained and when it is not, at least for low to medium rate requirements. At very high rates, the optimal linear precoder has an advantage over discrete-time constant-envelope precoding—because the vertical asymptote of discrete-time constant-envelope precoding is at a lower rate

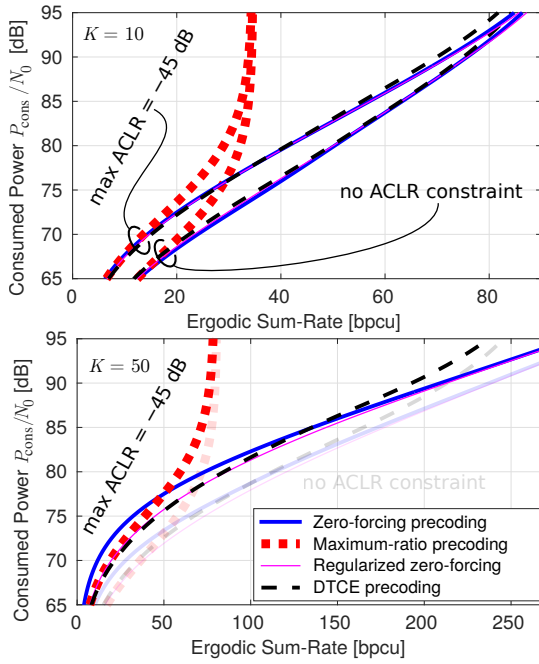


Fig. 7. The estimated consumed power of a base station with $M = 100$ antennas required to serve $K = 10$ (above) and $K = 50$ (below) users with a certain rate over a frequency-selective channel with $L = 4$ taps with and without a constraint on the ACLR.

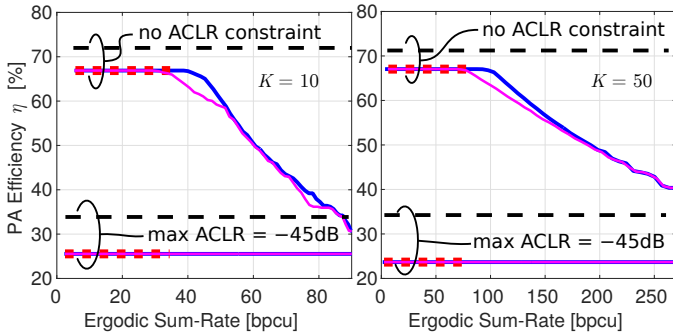


Fig. 8. The power efficiency of the amplifiers at the optimal operating point for different sum-rate requirements. The legend in Figure 7 also applies here.

than it is for the optimal linear precoder.

The value of η that corresponds to the optimal operating point of the amplifiers is shown in Figure 8. When there is no constraint on the out-of-band radiation, it is optimal to operate the amplifiers in saturation, where the power efficiency is high, for low rate requirements. For higher rate requirements, the amplifiers should be backed off to lower the in-band distortion for the conventional precoding schemes. The amplifiers of the low-PAR precoding scheme, however, continue to operate close to saturation also at high rates. When the ACLR is constrained to below -45 dB, the optimal efficiency of the amplifiers coincides with $\eta_{\max}$ (the highest permissible operating point), i.e. 34 % for discrete-time constant-envelope precoding and 27 % for maximum-ratio and zero-forcing precoding, over the whole range of rates investigated, both when serving 10 and 50 users. This corresponds to a backoff of 8 dB and 11 dB respectively.

V. CONCLUSIONS

We have compared four different multiuser MIMO precoders: maximum-ratio, zero-forcing, regularized zero-forcing and discrete-time constant-envelope precoding. They can be used for single-carrier transmission and for OFDM transmission. The different precoders and transmission methods are summarized in Table II.

In massive MIMO, there is little operational difference between OFDM and single-carrier transmission in terms of complexity, and in terms of PAR. It also turns out that single-carrier and OFDM transmission have the same performance in terms of data rate. Additionally, massive MIMO allows for time-domain channel inversion to be done with a short filter, for which the number of taps is of the same order of magnitude as the number of channel taps. This makes single-carrier transmission easy to implement and allows for running precoding with little delays. Since OFDM requires the users to be equipped with an additional FFT, this would suggest that single-carrier transmission should be considered in massive MIMO systems.

A massive MIMO system with centralized baseband processing also allows for low-PAR precoding, which increases the power efficiency of the amplifiers but requires more radiated power to compensate for the lowered array gain compared to conventional precoders. For the simplistic power amplifier model used, simulations have shown that the amplifiers of the base station consume the same amount of power when using low-PAR precoding as when using the optimal conventional precoder. Since low-PAR transmit signals are more hardware-friendly and could enable cheaper and simpler base station designs, this would suggest that a low-PAR precoding scheme that also pre-equalizes the channel and suppresses interference (such as discrete-time constant-envelope precoding) should be used in massive MIMO base stations with centralized baseband processing.

Furthermore, in massive MIMO, simulations have shown that the power efficiency of the amplifiers at the optimal operating point is limited by the out-of-band radiation requirement and that in-band distortion caused by nonlinear amplifiers has two parts: one clipping part that decreases the amplitude of the received signal and one part that can be seen as additive uncorrelated noise, which drowns in the thermal noise in representative cases. The amplitude lost due to clipping is small even when the amplifiers are operated close to saturation.

APPENDIX PROOF OF PROPOSITION 1

We show that single-carrier and OFDM transmission, both with a cyclic prefix added in front of each transmission block, result in the same achievable rate (28). To do that, the effects of the amplifiers are neglected. However, it is reasonable to assume that the in-band distortion caused by the amplifiers affects the two transmission schemes in the same way given that the amplitude distributions and PAR of the two transmission schemes are the same. The data rate of single-carrier and OFDM are the same if the array gains $|g_k^{\text{SC}}|^2 = |g_k^{\text{OFDM}}|^2$ and interference variances $I_k^{\text{SC}} = I_k^{\text{OFDM}}$ are the same.

TABLE II
PRECODING SCHEMES AND TRANSMISSION METHODS FOR MASSIVE MIMO

	equivalent when waterfilling and joint sequence detection is not done.	
	Single-Carrier	OFDM
general	Simple matched-filter detection Running precoding and detection, little delay Sensitive to time synchronization errors	Matched-filter detection in frequency domain (requires FFT at the users) Block-wise precoding and detection Sensitive to frequency synchronization errors
MR	Maximizes array gain Enables local precoding: distributed arrays Low complexity Performs well at low data rates	Has residual interference SINR as in (45), with $ g_k ^2 = M, I_k = \delta_k$
ZF	Nulls interuser and intersymbol interference Requires inversion of $K \times K$ -matrices	$\sim L$ -tap FIR filter SINR as in (45), with $ g_k ^2 = M - K, I_k = 0$
R-ZF	Linear precoder that maximizes SINR Optimization over parameter ρ needed Performance-wise similar to ZF for small K , but better for big K Requires inversion of $K \times K$ -matrices	$\sim L$ -tap FIR filter SINR as in (45), with $ g_k ^2 \in [M - K, M], I_k \in [0, \delta_k]$
DTCE	Low PAR Nonlinear precoder Optimization over parameter γ needed	Filter with delay $\sim L$

We start by expanding the array gain (31) for single-carrier transmission:

$$|g_k^{\text{SC}}|^2 = \frac{1}{\xi_k^2 \delta_k} \left| \mathbb{E} \left[s_k^*[n] \sum_m \sum_{\ell} \hat{h}_{km}[\ell] u_m[n - \ell] \right] \right|^2 \quad (71)$$

$$= \frac{1}{\xi_k^2 \delta_k} \left| \mathbb{E} \left[s_k^*[n] \sum_{m, \ell} \hat{h}_{km}[\ell] \sum_{k', \ell'} w_{mk'}[\ell'] s_{k'}[n - \ell - \ell'] \right] \right|^2 \quad (72)$$

Since different symbols are uncorrelated and since they have energy ξ_k , only terms for which $k' = k$ and $\ell = -\ell'$ will remain, so

$$|g_k^{\text{SC}}|^2 = \frac{1}{\delta_k} \left| \mathbb{E} \left[\sum_m \sum_{\ell} \hat{h}_{km}[\ell] w_{mk}[-\ell] \right] \right|^2. \quad (73)$$

This is a cyclic convolution evaluated in 0, which can be computed in the frequency domain followed by an inverse transform:

$$|g_k^{\text{SC}}|^2 = \frac{1}{\delta_k} \left| \sum_m \frac{1}{N} \sum_n \mathbb{E} \left[\hat{h}_{km}[n] \tilde{w}_{mk}[n] \right] \right|^2. \quad (74)$$

If the same precoding scheme f has been used for all frequencies, i.e. $f : \hat{\mathbf{H}}[n] \mapsto \tilde{\mathbf{W}}[n], \forall n$, then all the terms in the inner sum are the same:

$$|g_k^{\text{SC}}|^2 = \frac{1}{\delta_k} \left| \sum_m \mathbb{E} \left[\hat{h}_{km}[0] \tilde{w}_{mk}[0] \right] \right|^2, \quad (75)$$

which is also the array gain $|g_k^{\text{OFDM}}|^2$ of OFDM.

We now study the interference (40) for single-carrier transmission, by using (73):

$$I_k^{\text{SC}} = \mathbb{E} \left[\left| \sum_m \sum_{\ell} \hat{h}_{km}[\ell] u_m[n - \ell] - g_k s_k[n] \right|^2 \right] \quad (76)$$

$$= \mathbb{E} \left[\left| \sum_m \sum_{\ell} \hat{h}_{km}[\ell] \sum_{k'} \sum_{\ell'} w_{mk'}[\ell'] s_{k'}[n - \ell - \ell'] - s_k[n] \mathbb{E} \left[\sum_m \sum_{\ell} \hat{h}_{km}[\ell] w_{mk}[-\ell] \right] \right|^2 \right] \quad (77)$$

$$= \mathbb{E} \left[s_k[n] \left(\sum_{m, \ell} \hat{h}_{km}[\ell] w_{mk}[-\ell] - \mathbb{E} \left[\sum_{m, \ell} \hat{h}_{km}[\ell] w_{mk}[-\ell] \right] \right) + \sum_{(k', n') \neq (k, 0)} s_{k'}[n'] \sum_m \sum_{\ell} \hat{h}_{km}[\ell] w_{mk'}[n' - \ell] \right]^2 \quad (78)$$

Since different symbols are uncorrelated and since they have energy ξ_k , the square is expanded into the following.

$$I_k^{\text{SC}} = \sum_{k'} \sum_{n'} \xi_{k'} \mathbb{E} \left[\left| \sum_m \sum_{\ell} \hat{h}_{km}[\ell] w_{mk'}[n' - \ell] \right|^2 \right] - \xi_k \left| \mathbb{E} \left[\sum_m \sum_{\ell} \hat{h}_{km}[\ell] w_{mk}[-\ell] \right] \right|^2 \quad (79)$$

The two terms are cyclic convolutions in n' and 0 respectively and can be computed in the frequency domain. Along the same line of reasoning as in (75), the interference variance is given by $I_k^{\text{SC}} =$

$$\sum_{k'} \xi_{k'} \mathbb{E} \left[\left| \sum_m \hat{h}_{km}[0] \tilde{w}_{mk'}[0] \right|^2 \right] - \xi_k \left| \mathbb{E} \left[\sum_m \hat{h}_{km}[0] \tilde{w}_{mk}[0] \right] \right|^2, \quad (80)$$

which is precisely the interference variance I_k^{OFDM} of OFDM at tone 0, or at any other tone.

That the rate (28) is the same for single-carrier and OFDM transmission was proven, in a different way, for the special case maximum-ratio precoding in [22].

REFERENCES

- [1] C. Mollén, E. G. Larsson, and T. Eriksson, "On the impact of PA-induced in-band distortion in massive MIMO," *Proc. European Wireless*, May 2014.
- [2] T. L. Marzetta, "Noncooperative cellular wireless with unlimited numbers of base station antennas," *IEEE Transactions on Wireless Communications*, vol. 9, no. 11, pp. 3590–3600, Oct. 2010.
- [3] E. G. Larsson, O. Edfors, F. Tufvesson, and T. L. Marzetta, "Massive MIMO for next generation wireless systems," *IEEE Communications Magazine*, vol. 52, no. 2, pp. 186–195, Feb. 2014.
- [4] H. Q. Ngo, E. G. Larsson, and T. L. Marzetta, "Energy and spectral efficiency of very large multiuser MIMO systems," *IEEE Transactions on Communications*, vol. 61, no. 4, pp. 1436–1449, Feb. 2013.
- [5] H. Yang and T. L. Marzetta, "Performance of conjugate and zero-forcing beamforming in large-scale antenna systems," vol. 31, no. 2, pp. 172–179, Feb. 2013.
- [6] J. Hoydis, K. Hosseini, S. t. Brink, and M. Debbah, "Making smart use of excess antennas: Massive MIMO, small cells, and TDD," *Bell Labs Technical Journal*, vol. 18, no. 2, pp. 5–21, Sept. 2013.
- [7] G. Caire and S. Shamai, "On the achievable throughput of a multiantenna Gaussian broadcast channel," *IEEE Transactions on Information Theory*, vol. 49, no. 7, pp. 1691–1706, July 2003.
- [8] A. Goldsmith, S. A. Jafar, N. Jindal, and S. Vishwanath, "Capacity limits of MIMO channels," *IEEE Journal on Selected Areas in Communications*, vol. 21, no. 5, pp. 684–702, June 2003.
- [9] M. Joham, W. Utschick, and J. A. Nossek, "Linear transmit processing in MIMO communications systems," *IEEE Transactions on Signal Processing*, vol. 53, no. 8, pp. 2700–2712, Aug. 2005.
- [10] E. Björnson, M. Bengtsson, and B. Ottersten, "Optimal multiuser transmit beamforming: A difficult problem with a simple solution structure," *IEEE Signal Processing Magazine*, vol. 31, no. 4, pp. 142–148, July 2014.
- [11] M. Vu, "MISO capacity with per-antenna power constraint," *IEEE Transactions on Communications*, vol. 59, no. 5, pp. 1268–1274, Mar. 2011.
- [12] —, "MIMO capacity with per-antenna power constraint," in *Proc. IEEE Global Telecommunications Conference*, Dec. 2011, pp. 1–5.
- [13] W. Yu and T. Lan, "Transmitter optimization for the multi-antenna downlink with per-antenna power constraints," *IEEE Transactions on Signal Processing*, vol. 55, no. 6, pp. 2646–2660, June 2007.
- [14] H. Hemesi, A. Abdipour, and A. Mohammadi, "Analytical modeling of MIMO-OFDM system in the presence of nonlinear power amplifier with memory," *IEEE Transactions on Communications*, vol. 61, no. 1, pp. 155–163, Nov. 2013.
- [15] H. Ochiai, "An analysis of band-limited communication systems from amplifier efficiency and distortion perspective," *IEEE Transactions on Communications*, vol. 61, no. 4, pp. 1460–1472, Feb. 2013.
- [16] S. Mohammed and E. G. Larsson, "Constant-envelope multi-user precoding for frequency-selective massive MIMO systems," vol. 2, no. 5, pp. 547–550, Oct. 2013.
- [17] —, "Per-antenna constant envelope precoding for large multi-user MIMO systems," *IEEE Transactions on Communications*, vol. 61, no. 3, pp. 1059–1071, Mar. 2013.
- [18] C. Studer and E. G. Larsson, "PAR-aware large-scale multi-user MIMO-OFDM downlink," vol. 31, no. 2, pp. 303–313, Feb. 2013.
- [19] E. Björnson, J. Hoydis, M. Kountouris, and M. Debbah, "Massive MIMO systems with non-ideal hardware: Energy efficiency, estimation, and capacity limits," *IEEE Transactions on Information Theory*, vol. 60, no. 11, pp. 7112–7139, Nov. 2014.
- [20] E. Costa, M. Midrio, and S. Pupolin, "Impact of amplifier nonlinearities on OFDM transmission system performance," *IEEE Communications Letters*, vol. 3, no. 2, pp. 37–39, Feb. 1999.
- [21] J. Qi and S. Aissa, "Analysis and compensation of power amplifier nonlinearity in MIMO transmit diversity systems," *IEEE Transactions on Vehicular Technology*, vol. 59, no. 6, pp. 2921–2931, May 2010.
- [22] A. Pitarokoulis, S. K. Mohammed, and E. G. Larsson, "On the optimality of single-carrier transmission in large-scale antenna systems," *IEEE Wireless Communications Letters*, vol. 1, no. 4, pp. 276–279, Apr. 2012.
- [23] L. Sanguinetti, E. Björnson, M. Debbah, and A. L. Moustakas, "Optimal linear precoding in multi-user MIMO systems: A large system analysis," Dec. 2014, pp. 3922–3927.
- [24] S. Mohammed and E. G. Larsson, "Single-user beamforming in large-scale MISO systems with per-antenna constant-envelope constraints: The doughnut channel," *IEEE Transactions on Wireless Communications*, vol. 11, no. 11, pp. 3992–4005, Sept. 2012.
- [25] H. Yang and T. L. Marzetta, "A macro cellular wireless network with uniformly high user throughputs," in *Proc. Veh. Technology Conf.*, Sept. 2014, pp. 1–5.
- [26] N. Benvenuto, R. Dinis, D. Falconer, and S. Tomasin, "Single carrier modulation with nonlinear frequency domain equalization: An idea whose time has come—again," *Proceedings of the IEEE*, vol. 98, no. 1, pp. 69–96, 2010.
- [27] F. H. Raab, P. Asbeck, S. Cripps, P. B. Kenington, Z. B. Popovic, N. Potheary, J. F. Sevic, and N. O. Sokal, "Power amplifiers and transmitters for RF and microwave," *IEEE Transactions on Microwave Theory and Techniques*, vol. 50, no. 3, pp. 814–826, Mar. 2002.
- [28] E. Björnson, M. Matthaiou, and M. Debbah, "Massive MIMO with arbitrary non-ideal arrays: Hardware scaling laws and circuit-aware design," *ArXiv E-Print*, Sept. 2014, arXiv:1409.0875 [cs.IT].
- [29] 3GPP TS36.141 3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) Conformance Testing (Release 10), 3GPP Std., Rev. V10.2.0, 2011.